


Terrazzo

Overview


Feature	Description
Collection	Living Local
Style	Terrazzo (C0180)
Product Type	LVT
Size	12 in x 24 in
Construction	Commercial LVT
Gauge	2.5 mm
Total Thickness	2.5 mm
Wear Layer	20 mil (0.5 mm)
Finish	M-Force™ Ultra
Edge Profile	Micro-Beveled
Installation	Glue Down
Installation Method	Brick Ashlar, Half Lap, Herringbone, Random
Recommended Adhesive	M95.0, M99, MS160, M700 Plus, or Total Bond Adhesive

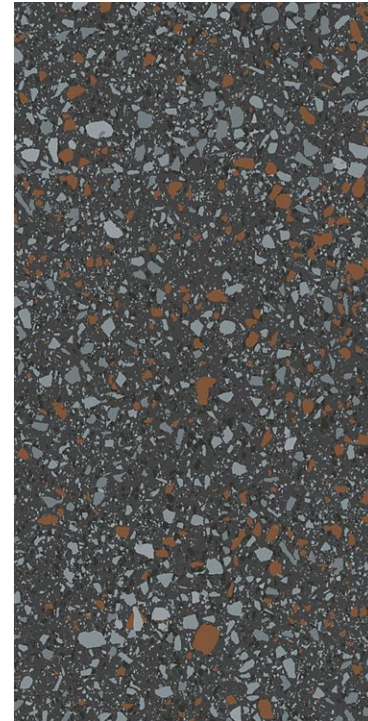


Recommended Installation Methods



Brick Ashlar



Half Lap



Herringbone



Random

Colorways




Tephra

Color code: 727
Style number: C0180



Lahar

Color code: 986
Style number: C0180



Strabe

Color code: 736
Style number: C0180



Valle De Bove

Color code: 989
Style number: C0180



Mascali

Color code: 585
Style number: C0180



Catania


Color code: 826
Style number: C0180

Colorways




Mongibello

Color code: 848
Style number: C0180




Mercato

Color code: 722
Style number: C0180



Linosa

Color code: 939
Style number: C0180




Vesuvius

Color code: 723
Style number: C0180




Basal

Color code: 982
Style number: C0180



Somma

Color code: 985
Style number: C0180



Messina

Color code: 726
Style number: C0180

Testing

Feature	Description
Classification	(ASTM F1700) Class III, Type B, Embossed
Squareness	(ASTM F2421) ± 0.10 in
Size and Tolerance	(ASTM F2421) ± 0.016 in
Thickness	(ASTM F386) $\pm .005$ in
Flexibility	(ASTM F137) Passes
Dimensional Stability	(ASTM F2199) Passes
Static Load Limit	(ASTM F970) 1000 psi
Residual Indentation	(ASTM F1914) Passes
Resistance to Chemicals	(ASTM F925) Passes
Resistance to Light	(ASTM F1515) Passes
Resistance to Heat	(ASTM F1514) Passes
Radiant Flux	(ASTM E648) Class 1
Smoke Density	(ASTM E662) = 450
Wear Layer Thickness	20 mil (0.5 mm)
Lightfastness	(ASTM F1515) Passes

Sustainability

Feature	Description
Embodied Carbon	6.41 kg CO2e/sq m2
Carbon Handprint	-6.73 kg CO2e/sq m2
Beyond Carbon Neutral	-0.321
EPD	Flex 2.5 LVT EPD
Material Health	Free of Orthophthalates and Heavy Metals
LEED	Calculate LEED on Ecomedes
MindClick Rating	Achiever
Country of Origin	USA

Packaging

Feature	Description
Pieces per Carton	18
Weight per Piece	1.7025
Cartons Per Pallet	60
Square Feet per Carton	36
Weight per Carton	30.645

Warranties

Limited 20 Year M-Force Ultra Commercial Warranty